


## MOTORISED ALUMINIUM ROLLER SHUTTER (SIMU MOTOR) SUGGESTED BULKHEAD DETAILS

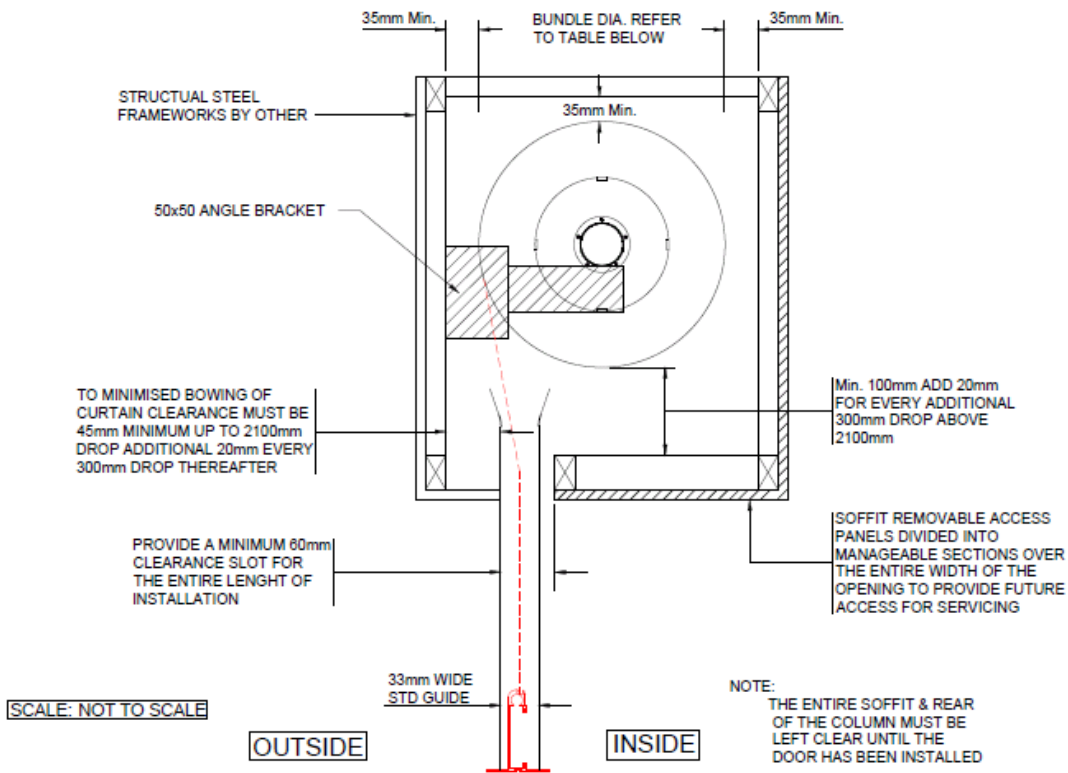

N.B. THE INTERNAL END OF THE BULKHEAD MUST BE CLEAR TO AT LEAST A MINIMUM 120mm FROM FRONT OF GUIDE  
i.e. OPENING WIDTH + 120 PER SIDE (REFER TO TECH 9AA & 10AA)

N.B. DROP HEIGHT IS MEASURED FROM SOFFIT OR BULKHEAD LINE TO THE FLOOR

N.B. REMOVABLE MULLIONS ARE NOT SUITABLE FOR THIS PRODUCT

**ARCO (QLD) TYPICAL DIMENTIONS REQUIRED FOR VARIUS DROP**

Drop height	1200	1500	1800	2100	2400	2700	3000	3300	3600	3900	4000
Bundle Dia	310	320	340	350	360	390	420	430	440	450	460
Min. TOTAL HORIZONTAL INTERNAL SPACE REQUIRED	410	430	440	450	480	530	580	610	640	670	700
Min. TOTAL VERTICAL INTERNAL SPACE REQUIRED	540	550	570	580	590	620	650	660	670	680	690

MAXIMUM SIZES (INTERNAL APPLICATIONS ONLY)	WIDTH	HEIGHT
CLEAR RS	5500	4000
SLIMLINE RS	5000	4200
ARCADE 2 RS	5000	4000